

# Level Measurement

## Continuous level measurement – Radar transmitters

SITRANS Probe LR

### Overview



SITRANS Probe LR is a 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage vessels with nominal pressure and temperature, to a range of 20 m (66 ft).

### Benefits

- Uni-Construction polypropylene rod antenna standard
- Easy installation and simple startup
- Programming using infrared Intrinsically Safe handheld programmer, SIMATIC PDM or HART handheld communicator
- Communication using HART
- Patented Process Intelligence signal processing
- Extremely high signal-to-noise ratio
- Auto False-Echo Suppression of false echoes

### Application

The Probe LR is ideal for applications with chemical vapours, temperature gradients, vacuum or pressure, such as tank farms, chemical storage, digesters and long-range applications. SITRANS Probe LR has a range of 0.3 to 20 m (1 to 65 ft).

Probe LR is designed for safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. It has a standard Uni-Construction polypropylene rod antenna that offers excellent chemical resistance and is hermetically sealed. The Uni-Construction antenna includes an internal, integrated shield that eliminates vessel nozzle interference.


SITRANS Probe LR incorporates Process Intelligence signal processing. The Probe LR also has a high signal-to-noise ratio leading to improved reliability.

Start-up is easy with as few as two parameters for basic operation. Programming is simple using SIMATIC PDM, HART handheld communicator or the Intrinsically Safe handheld programmer.


- Key Applications: tank farms, chemical storage, wastewater wet well

### Configuration


#### Installation

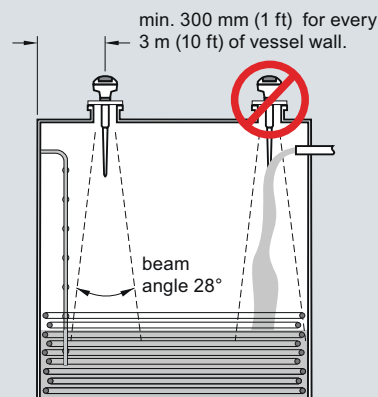


#### Mounting unit on vessel

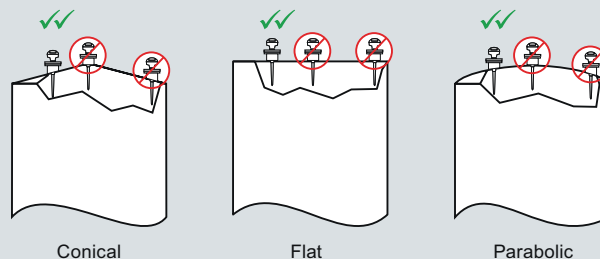

#### Mounting on a manhole cover



#### Mounting on a nozzle



SITRANS Probe LR installation, dimensions in mm (inch)

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS Probe LR

#### Technical specifications

##### Mode of operation

Measuring principle	Pulse radar level measurement
Frequency	5.8 GHz (North America 6.3 GHz)
Measuring range	0.3 ... 20 m (1.0 ... 65 ft)

##### Output

Analog output	4 ... 20 mA
Accuracy	± 0.02 mA
Span	Proportional or inversely proportional
Communications	HART

##### Performance (reference conditions)

Accuracy	± the greater of 0.1% of range or 10 mm (0.4 inch)
Influence of ambient temperature	0.003%/K
Repeatability	± 5 mm (2 inch)
Fail-safe	mA signal programmable as high, low or hold (LOE)

##### Rated operating conditions

Installation conditions	
• Location	Indoor/outdoor
Ambient conditions (enclosure)	
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)
• Installation category	I
• Pollution degree	4

##### Medium conditions

Dielectric constant $\epsilon_r$	$\epsilon_r > 1.6$ (for $\epsilon_r < 3$ , use stillpipe)
Vessel temperature	-40 ... +80 °C (-40 ... +176 °F)
Vessel pressure	3 bar g (43.5 psi g)

##### Design

Enclosure	
• Body construction	PBT (Polybutylene Terephthalate)
• Lid construction	PEI (Polyether Imide)
• Cable inlet	2 x M20x1.5 or 2 x 1/2" NPT with adapter
Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6, IP67, IP68
Weight	1.97 kg (4.35 lb)
Antenna	
• Material	Polypropylene rod, hermetically sealed construction
• Dimensions	Standard 100 mm (4 inch) shield for maximum 100 mm (4 inch) nozzle or optional 250 mm (10 inch) long shield
Process connections	1 1/2" NPT [(Taper), ANSI/ASME B1.20.1] R 1 1/2" [(BSPT), EN 10226] G 1 1/2" [(BSPP), EN ISO 228-1]

##### Power supply

- Nominal 24 V DC with max. 550  $\Omega$ , maximum 30 V DC
- 4 ... 20 mA

##### Certificates and approvals

General	CSA <sub>US/C</sub> , CE, FM, C-TICK
Marine	• Lloyd's Register of Shipping • ABS Type Approval
Radio	FCC, Industry Canada and European (R&TTE), C-TICK
Hazardous	
• Europe	ATEX II 1G EEx ia IIC T4
• USA	Intrinsically Safe barrier required FM Class I, Div. 1, Groups A,B,C,D; Class II, Div. 1, Groups E,F,G; Class III
• Canada	Intrinsically Safe barrier required CSA Class I, Div. 1, Groups A,B,C,D; Class II, Div. 1, Group G; Class III
• Brazil - INMETRO	BR-Ex ia IIC T4

##### Programming

Handheld programmer	HART communicator 375
PC	SIMATIC PDM
Intrinsically safe Siemens handheld programmer (optional)	Infrared receiver
• Approvals (handheld programmer)	ATEX II 1G EEx ia IIC T4 CSA and FM Class I, Div. 1, Groups A,B,C,D, T6 at max. ambient
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages

# Level Measurement

## Continuous level measurement – Radar transmitters

SITRANS Probe LR


Selection and Ordering data	Order No.	Selection and Ordering data	Order code
<b>SITRANS Probe LR</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage vessels with nominal pressure and temperature, to a range of 20 m (66 ft). Max. 3 bar g (43.5 psi g) pressure and 80 °C (176 °F)	C) <b>7ML5430-00</b>	<b>Further designs</b> Please add <b>"-Z"</b> to Order No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000	<b>Y15</b> <b>C11</b>
<b>Enclosure/Cable inlet</b> Plastic, (PBT), 2 x 1/2" NPT Plastic, (PBT), 2 x M20x1.5	1 2	<b>Operating Instructions</b> English French Spanish German Note: The Operating Instructions should be ordered as a separate item on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	Order No. C) <b>7ML1998-5HR02</b> C) <b>7ML1998-5HR11</b> C) <b>7ML1998-5HR21</b> C) <b>7ML1998-5HR32</b>
<b>Antenna type/Material - (max. 3 bar and 80 °C)</b> Polypropylene Antenna 1 1/2" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 100 mm shield R 1 1/2" [(BSPT), EN 10226], c/w integral 100 mm shield G 1 1/2" [(BSPP), EN ISO 228-1], c/w integral 100 mm shield 1 1/2" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 250 mm shield R 1 1/2" [(BSPT), EN 10226], c/w integral 250 mm shield G 1 1/2" [(BSPP), EN ISO 228-1], c/w integral 250 mm shield	A B C D E F	<b>Additional Operating Instructions</b> Multi-language Quick Start manual <b>Optional equipment</b> Handheld programmer, Intrinsically Safe, ATEX II 1G, Ex ia HART modem/RS-232 (for use with a PC and SIMATIC PDM) HART modem/USB (for use with a PC and SIMATIC PDM) One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F) SITRANS RD100 Remote display - see Chapter 8 SITRANS RD200 Remote display - see Chapter 8 SITRANS RD500 web, datalogging, alarming, ethernet, and modem support for instrumentation - see Chapter 8 <b>Spare parts</b> Plastic lid	C) <b>7ML1998-5QP81</b> <b>7ML5830-2AH</b> D) <b>7MF4997-1DA</b> D) <b>7MF4997-1DB</b> <b>7ML1930-1AP</b> K) <b>7ML5750-1AA00-0</b> <b>7ML1830-1KB</b>
<b>Approvals</b> General Purpose, CE, R&TTE, C-TICK General Purpose, CSAus/c, FM, FCC CSA Class I, Div 1, Groups A, B, C, D, Class II, Div. 1 Group G, Class III, FCC, Intrinsically Safe <sup>1)</sup> FM, Class I, II and III, Div 1, Groups A, B, C, D, E, F, G, FCC, Intrinsically Safe <sup>1)</sup> ATEX II 1G EEx ia IIC T4, R&TTE, C-TICK, Intrinsically Safe <sup>1)</sup>	A B C D E		
<b>Communication/Output</b> 4 ... 20 mA, HART	1		
<p><sup>1)</sup> Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection</p> <p>C) Subject to export regulations AL: N, ECCN: EAR99.</p> <p>C) Subject to export regulations AL: N, ECCN: EAR99. D) Subject to export regulations AL: N, ECCN: EAR99H. K) Subject to export regulations AL: N, ECCN: 5A991X.</p>			

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS Probe LR


#### Dimensional drawings

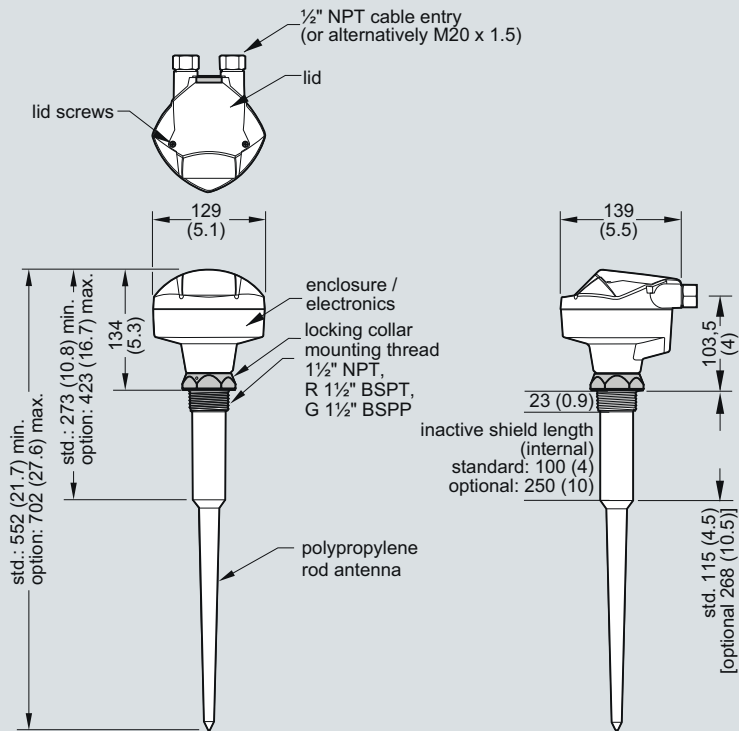

SITRANS Probe LR, dimensions in mm (inch)


5

#### Schematics

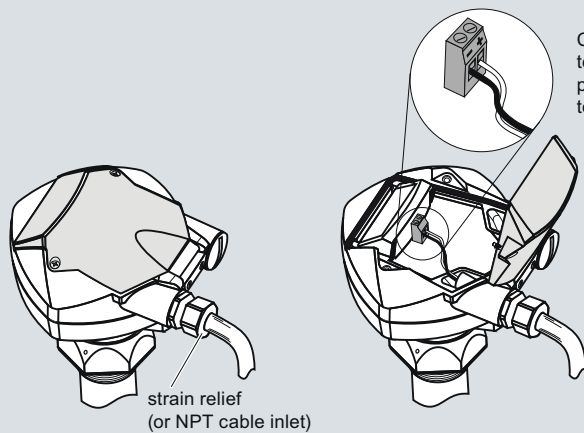

Connect the wires to the terminals as shown: the polarity is identified on the terminal block.

#### Hand Programmer



#### SITRANS Probe LR

Part number: 7ML5830-2AH

#### Notes:

- DC terminal shall be supplied from an SELV source in accordance with IEC-1010-1 Annex H.
- All field wiring must have insulation suitable for rated input voltages.
- Use shielded twisted pair cable (14-22 AWG)
- Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS Probe LR connections